


22703 TOMI LED3W GU10-CW

LED light source

5905339227034



Kanlux TOMI LED sources use hybrid heat sink construction thanks to which heat exchange with the environment is much more effective. Moreover, white colour of Kanlux TOMI LED housing makes the source's design interesting. The light in these sources is evenly distributed by the use of matt shade.

TYPE OF LIGHT SOURCE:

Lighting technology used: LED
Non-directional or directional light source: DLS
Mains or non-mains light source: MLS
Connected light source (CLS): no
Colour-tuneable light source: no
High luminance light source: no
Anti-glare shield: no
Dimmable: no

PRODUCT PARAMETERS:


Colour: white
Compatible with a dimmer: no
Diameter [mm]: 50
Mercury content: no
Rated voltage [V]: 220-240 AC
Rated frequency [Hz]: 50
Lamp rated current [mA]: 30
Rated power [W]: 3
Lampshade material: plastic
Light source: PAR16
Diode type: LED SMD
Colour temperature: cold white
Cap: GU10
Rated lamp-service life [h]: 20000
Number of on/off cycles: ≥15000
Light source shape: spot

GENERAL PRODUCT PARAMETERS:

Energy consumption in on-mode (kWh/1000h): 3
Energy efficiency class: F
Useful luminous flux Φ_{use} [lm]: 220
Useful luminous flux Φ_{use} [lm]: in wide cone (120°)
Correlated colour temperature [K]: 5300
On-mode power P_{on} [W]: 3
Height [mm]: 55
Width [mm]: 50
Depth [mm]: 50
Colour rendering index: 80

22703 TOMI LED3W GU10-CW

LED light source

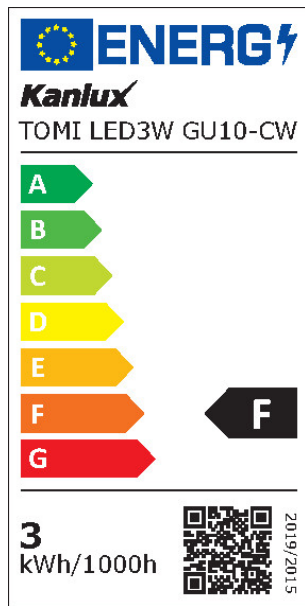

Chromaticity coordinates (x): x 0,336; y 0,348

Chromaticity coordinates (y): 0.348

Claim of equivalent power [W]: 26

PARAMETERS FOR DIRECTIONAL LIGHT SOURCES:

Beam angle [°]: 120

PARAMETERS FOR LED AND OLED LIGHT SOURCES:

R9 colour rendering index value: 32

Survival factor: ≥ 0.9

The lumen maintenance factor: 0.95

PARAMETERS FOR LED AND OLED MAINS LIGHT SOURCES:

Displacement factor (cos ϕ 1): 0.5

Colour consistency in McAdam ellipses: ≤ 6

LED light source replaces a fluorescent light source without integrated ballast of a particular wattage: Not applicable

Flicker metric (Pst LM): $\leq 1,0$

Stroboscopic effect metric (SVM): $\leq 0,4$

LOGISTIC DATA:

Unit of measurement: unit

Packaging method: 10

Number of units in the secondary packaging: 10

Number of units in the packaging: 100

Net unit weight [g]: 28

Grammage [g]: 42

Length of a unit pack [cm]: 5

Width of a unit pack [cm]: 5

Height of a unit pack [cm]: 6.5


Weight of a cardboard box [kg]: 4.2

Width of a cardboard box [cm]: 28

Height of a cardboard box [cm]: 15

Length of a cardboard box [cm]: 54

Volume of a cardboard box [m³]: 0.02268

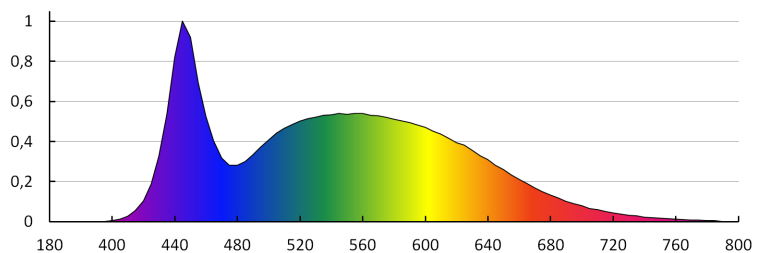

22703 TOMI LED3W GU10-CW

LED light source

