

29642 XLED A60 5W-SW



LED light source

5905339296429

1800K
SUPER
WARM



DECO
RI
function

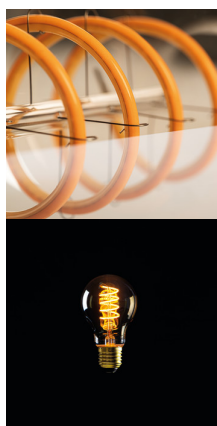

A decorative version of a “true LED bulb”. Kanlux XLED in this exceptional version will help you create a very cosy atmosphere. All thanks to a very warm colour of the light and an amber glass in which a spiral LED filament is enclosed. This bulb will become a decoration of your house, café, restaurant and any other place in which you will install it. It is an exceptional combination of a decorative nature, vintage style and modern energy-efficient LED technology.

TYPE OF LIGHT SOURCE:

Lighting technology used: LED

Non-directional or directional light source: NDLS

Mains or non-mains light source: MLS

Connected light source (CLS): no

Colour-tuneable light source: no

High luminance light source: no

Anti-glare shield: no

Dimmable: no

PRODUCT PARAMETERS:

Colour: amber

Compatible with a dimmer: no

Diameter [mm]: 60

Mercury content: no

Rated voltage [V]: 220-240 AC

Rated frequency [Hz]: 50

Lamp rated current [mA]: 40

Rated power [W]: 5

Lampshade material: glass

Light source: A60

Diode type: LED FILAMENT

Colour temperature: super warm

Cap: E27

Rated lamp-service life [h]: 15000

Number of on/off cycles: ≥15000

Light source shape: standardowa

GENERAL PRODUCT PARAMETERS:

Energy consumption in on-mode (kWh/1000h): 5

Useful luminous flux Φ_{use} [lm]: 230

Useful luminous flux Φ_{use} [lm]: in sphere (360°)


Correlated colour temperature [K]: 1800

On-mode power P_{on} [W]: 5

Height [mm]: 104

29642 XLED A60 5W-SW

LED light source

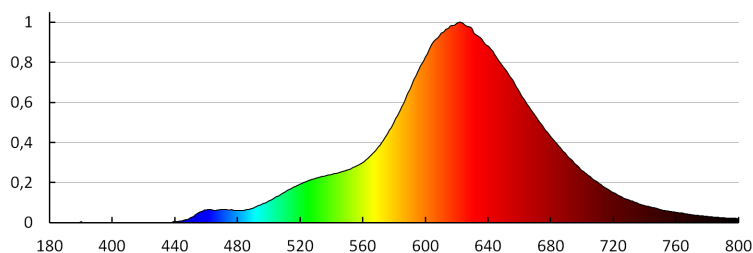**Width [mm]: 60****Depth [mm]: 60****Colour rendering index: 80****Claim of equivalent power [W]: 23****PARAMETERS FOR LED AND OLED LIGHT SOURCES:****R9 colour rendering index value: 15****Survival factor: ≥ 0.9** **The lumen maintenance factor: 0.93****PARAMETERS FOR LED AND OLED MAINS LIGHT SOURCES:****Displacement factor ($\cos \phi 1$): 0.5****Colour consistency in McAdam ellipses: ≤ 6** **LED light source replaces a fluorescent light source without integrated ballast of a particular wattage: Not applicable****Flicker metric (Pst LM): $\leq 1,0$** **Stroboscopic effect metric (SVM): $\leq 0,4$** **LOGISTIC DATA:****Unit of measurement: unit****Packaging method: 10****Number of units in the secondary packaging: 10****Number of units in the packaging: 100****Net unit weight [g]: 30****Grammage [g]: 61.8****Length of a unit pack [cm]: 6.5****Width of a unit pack [cm]: 6.5****Height of a unit pack [cm]: 12****Weight of a cardboard box [kg]: 6.18****Width of a cardboard box [cm]: 35****Height of a cardboard box [cm]: 27****Length of a cardboard box [cm]: 69.5****Volume of a cardboard box [m³]: 0.065678**

29642 XLED A60 5W-SW

LED light source

