


26760 DUN HI 8W E14-WW

LED light source

5905339267603




The small-size Kanlux DUN HI is a “candle-type” bulb with E14 screw. Durability of these light sources results from the combination of LED SMD diodes and ceramic housing. Kanlux DUN HI are characterised by high luminous efficiency, at the power of 8W they emit light with a stream of 800 lm. They are perfect for wall lamps and chandeliers in all places where we want a lot of light even though the source is small.

TYPE OF LIGHT SOURCE:**Lighting technology used:** LED**Non-directional or directional light source:** NDLS**Mains or non-mains light source:** MLS**Connected light source (CLS):** no**Colour-tuneable light source:** no**High luminance light source:** no**Anti-glare shield:** no**Dimmable:** no**PRODUCT PARAMETERS:****Colour:** white**Compatible with a dimmer:** no**Diameter [mm]:** 37**Mercury content:** no**Rated voltage [V]:** 220-240 AC**Rated frequency [Hz]:** 50/60**Lamp rated current [mA]:** 57**Rated power [W]:** 8**Material:** plastic**Lampshade material:** plastic**Light source:** C37**Diode type:** LED SMD**Colour temperature:** Warm white**Cap:** E14**Rated lamp-service life [h]:** 17500**Number of on/off cycles:** ≥15000**Light source shape:** swieczka**GENERAL PRODUCT PARAMETERS:****Energy consumption in on-mode (kWh/1000h):** 8**Energy efficiency class:** F**Useful luminous flux Φ_{use} [lm]:** 800**Useful luminous flux Φ_{use} [lm]:** in sphere (360°)**Correlated colour temperature [K]:** 3000**On-mode power P_{on} [W]:** 8**Height [mm]:** 110

26760 DUN HI 8W E14-WW

LED light source

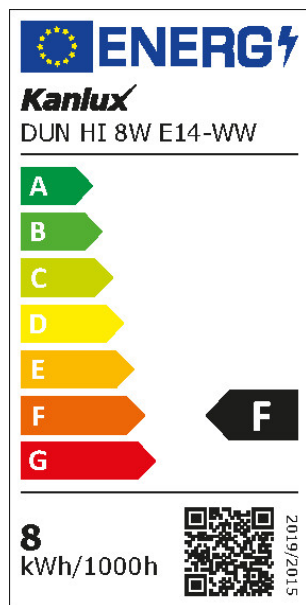

Width [mm]: 37

Depth [mm]: 37

Colour rendering index: 80

Chromaticity coordinates (x): 0.44

Chromaticity coordinates (y): 0.403

Claim of equivalent power [W]: 59

PARAMETERS FOR LED AND OLED LIGHT SOURCES:

R9 colour rendering index value: 2

Survival factor: ≥ 0.9

The lumen maintenance factor: 0.94

PARAMETERS FOR LED AND OLED MAINS LIGHT SOURCES:

Displacement factor ($\cos \phi$): 0.5

Colour consistency in McAdam ellipses: ≤ 6

LED light source replaces a fluorescent light source without integrated ballast of a particular wattage: Not applicable

Flicker metric (Pst LM): $\leq 1,0$

Stroboscopic effect metric (SVM): $\leq 0,4$

LOGISTIC DATA:

Unit of measurement: unit

Packaging method: 10

Number of units in the secondary packaging: 10

Number of units in the packaging: 100

Net unit weight [g]: 48

Grammage [g]: 61

Length of a unit pack [cm]: 4

Width of a unit pack [cm]: 4

Height of a unit pack [cm]: 11.5


Weight of a cardboard box [kg]: 6.1

Width of a cardboard box [cm]: 24

Height of a cardboard box [cm]: 26

Length of a cardboard box [cm]: 42

Volume of a cardboard box [m³]: 0.026208

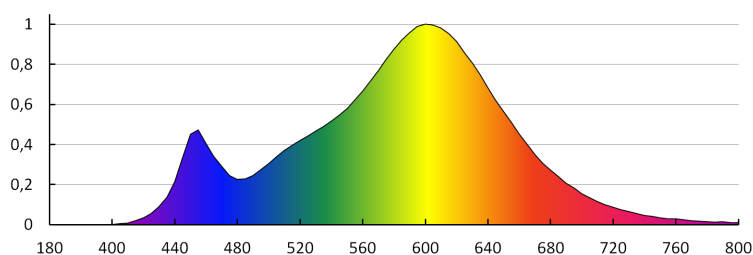

26760 DUN HI 8W E14-WW

LED light source

KANLUX S.A. (kat 26760) DUN HI 8W E14-WW / Krzywa rozsyłu światła
(biegunowo)

Oprawa: KANLUX S.A. (kat 26760) DUN HI 8W E14-WW
Lampy: 1 x DUN HI 8W E14-WW

