

27330 STREET LED 4000 NW

Parking lighting LED

5905339273307



The Kanlux STREET LED is equipped with very-high quality LED's, which are fitted in replaceable modules. Their efficacy is at least 130 lumen for 1 Watt! Their modern design fits in very well with urban spaces. We recommend the ADTR15D adapter for these fixtures.

GENERAL DATA:


Colour: grey
Place of application: Indoors and outdoors
Minimum distance from the illuminated object: 1m
Compatible with a dimmer: no
Length [mm]: 265
Width [mm]: 74
Height [mm]: 354
Wire length [m]: 0.4
Integrated LED light source: yes

TECHNICAL DATA:

Rated voltage [V]: 220-240 AC
Rated frequency [Hz]: 50
Maximum power [W]: 30
Class of protection against electric shock: I
Lampshade material: plastic
Diode type: LED SMD
Luminous flux [lm]: 3900
Colour temperature: white
Correlated colour temperature [K]: 4000
Colour consistency in McAdam ellipses: ≤6
Colour rendering index: 70
Service life [h]: 35000
Number of on/off cycles: ≥20000
Lighting angle [°]: X100/Y145
Luminous efficiency of the lamp [lm/W]: 130
Ambient temperature range to which the product can be exposed: -35÷40
Enclosure material: aluminum alloy
Connection type: Free cable ends
Wire diameter [mm²]: 1
Lamp-heating time [s]: ≤1
Lamp-ignition time [s]: ≤0,5
IP class: 65

27330 STREET LED 4000 NW

Parking lighting LED

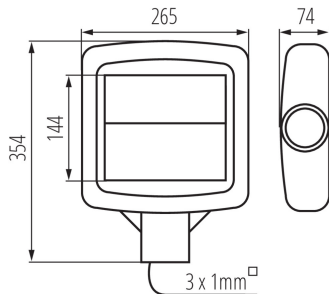


LOGISTIC DATA:

Unit of measurement: unit
Packaging method: 1
Number of units in the secondary packaging: 1
Number of units in the packaging: 1
Net unit weight [g]: 1822
Grammage [g]: 2200
Length of a unit pack [cm]: 38.5
Width of a unit pack [cm]: 13
Height of a unit pack [cm]: 31.5
Weight of a cardboard box [kg]: 2.2
Width of a cardboard box [cm]: 13
Height of a cardboard box [cm]: 31.5
Length of a cardboard box [cm]: 38.5
Volume of a cardboard box [m³]: 0.015766




ADDITIONAL INFORMATION:

- STREET LED ADTR 15D Two adjustment ranges: - adaptor in a vertical position - with adjustments from -15° to $+15^{\circ}$ - adaptor in an right angle position (90 degrees) - with adjustments from -5° to $+15^{\circ}$

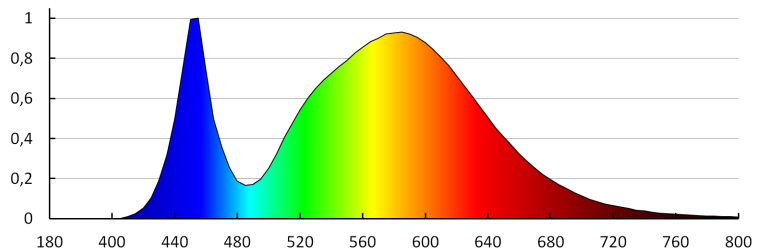

KANLUX S.A. (kat 27330) STREET LED 4000 NW / LDC (Polar)

Luminaire: KANLUX S.A. (kat 27330) STREET LED 4000 NW
Lamps: 1 x STREET LED 4000 NW

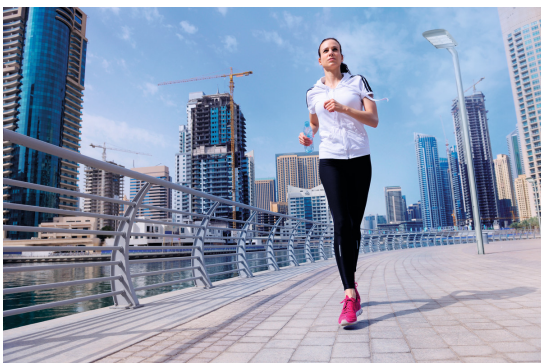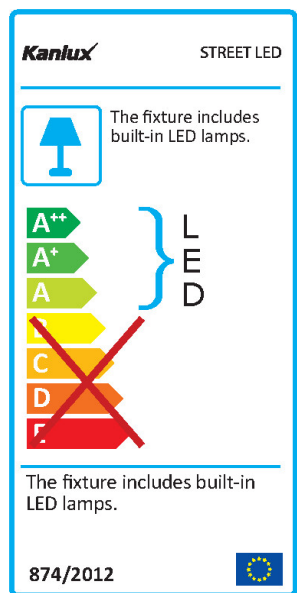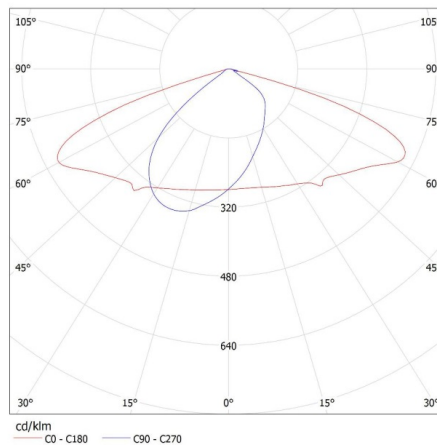

27330 STREET LED 4000 NW

Parking lighting LED

ACCESSORIES:

27333 STREET LED ADTR 15D



Adjustable adaptor intended for installing STREET LED parking fixtures on vertical posts with \varnothing 60mm to \varnothing 63mm diameter ends.