


## Track light projector

5905339331328







Kanlux ACORD ATL 1 are integrated lighting fixtures to be mounted on three-phase track. These are lamps that can be adapted to our individual needs. We can choose white or black, two powers (18W and 30W), light color and lighting angle (standard is 60°, but we can replace the reflector and change the angle to 15° or 36°) depending on whether we want to illuminate the surface or a specific detail . Kanlux ACORD ATL 1 stands for 50 000 hours of durability and a 5-year warranty. Branded key components (LED COB and power supply), high level of real color rendering (CRI> 90) and elimination of glare (UGR <19) are other advantages of these unique luminaires.

### **GENERAL DATA:**

Colour: white

Place of assembly: rail TEAR Place of application: Indoors

Minimum distance from the illuminated object: 0,5m

Compatible with a dimmer: no Integrated LED light source: yes

### TECHNICAL DATA:

Rated voltage [V]: 220-240 AC Rated frequency [Hz]: 50 Maximum power [W]: 18

Class of protection against electric shock: ||

Diode type: LED COB Luminous flux [lm]: 1800 Colour temperature: white

Correlated colour temperature [K]: 4000 Colour consistency in McAdam ellipses: ≤6

Colour rendering index: 90 Service life [h]: 50000

Number of on/off cycles: ≥30000

Lighting angle [°]: 60

Luminous efficiency of the lamp [lm/W]: 100

Ambient temperature range to which the product can be

exposed: 5÷25

Enclosure material: aluminum alloy Protective glass material: plastic Lamp-heating time [s]: ≤1

Lamp-ignition time [s]:  $\leq 0.5$ 

The fixture is movable horizontally [°]: 315 The fixture is movable vertically [°]: 90

IP class: 20





## Track light projector



## LOGISTIC DATA:

Unit of measurement: unit Packaging method: 20

Number of units in the secondary packaging: 1


Number of units in the packaging: 20

Net unit weight [g]: 530 Grammage [g]: 655

Length of a unit pack [cm]: 20
Width of a unit pack [cm]: 8
Height of a unit pack [cm]: 16.5
Weight of a cardboard box [kg]: 13.1
Width of a cardboard box [cm]: 43
Height of a cardboard box [cm]: 35.5
Length of a cardboard box [cm]: 43
Volume of a cardboard box [m³]: 0.06564


## **ADDITIONAL INFORMATION:**


- 5 years Warranty under the terms of the warranty statement, available on our website
- for installation on the TEAR N busbar

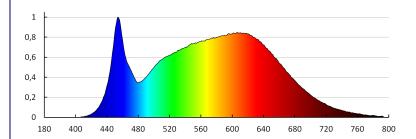

KANLUX S.A. (kat 33132) ATL1 18W-940-S6-W / LDC (Polar)

Luminaire: KANLUX S.A. (kat 33132) ATL1 18W-940-S6-W Lamps: 1 x ATL1 18W-940-S8





We reserve the right to make technical changes. The data contained in this material are not legally binding. Photometry: the results obtained from testing were from a specific sample.






# Track light projector


#### KANLUX S.A. (kat 33132+33140) ATL1 18W-940-S6-W + 33140 / LDC (Polar)


Luminaire: KANLUX S.A. (kat 33132+33140) ATL1 18W-940-S6-W + 33140 Lamps: 1 x ATL1 18W-940-S6



#### KANLUX S.A. (kat 33132+33141) ATL1 18W-940-S6-W + 33141 / LDC (Polar)

Luminaire: KANLUX S.A. (kat 33132+33141) ATL1 18W-940-S6-W + 33141 Lamps: 1 x ATL1 18W-940-S8





We reserve the right to make technical changes. The data contained in this material are not legally binding. Photometry: the results obtained from testing were from a specific sample.





## Track light projector

## ACCESSORIES:

REF ATL1-18W-S15 Reflector for the ATL 1 luminaire, 18 W, 15 degrees



REF ATL1-18W-S36 Reflector for the ATL 1 luminaire, 18 W, 36 degrees



REF ATL1-30W-S15 Reflector for the ATL 1 luminaire, 30 W, 15 degrees



REF ATL1-30W-S36 Reflector for the ATL 1 luminaire, 30 W, 36 degrees





We reserve the right to make technical changes. The data contained in this material are not legally binding. Photometry: the results obtained from testing were from a specific sample.

