


## GARDEN LIGHT LED RGB+CCT 50W 230VAC FUTC06



Garden Light LED RGB+CCT 50W 230VAC MiLight/MiBoxer FUTC06 has the ability to smoothly adjust the brightness, color of light, and the color temperature of white light in the range of 2700-6500K. It has a narrow 25° light beam angle with an adjustable rotating ring that allows you to change the direction. Control via a remote control or smartphone application (Wi-Fi bridge WL-BOX1 required). The LED luminaire acts as a repeater, while maintaining a 30m spacing between successive elements, allows for unlimited range.

### Compatible products

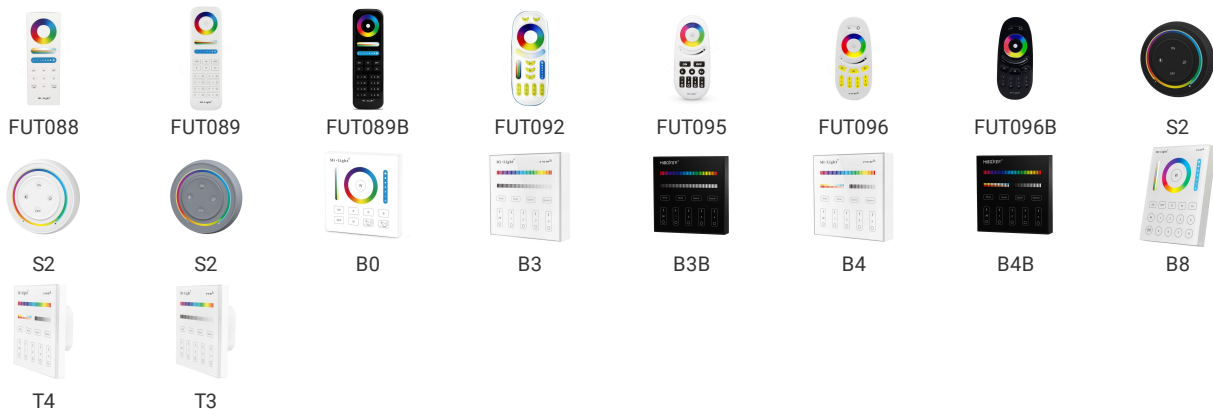

### Specification

Parameter	Value
Symbol	FUTC06
ETIM CLASS	Downlight/spot/floodlight
Nominal voltage [V]	100 - 240
Voltage type	AC
Dimmable	yes
Luminous flux [lm]	4000
Colour temperature [K]	2700-6500
Power [W]	50
Power for white light [W]	50
Beam angle	Medium beam 21 - 40°
Colour rendering index CRI	CRI80

Power factor	0.9
Colour of light	RGB+CCT
With movement sensor	yes
With light sensor	yes
Lamp type	LED not exchangeable
Lamp efficacy [lm/W]	80
Length [mm]	310
Width [mm]	220
Height/depth [mm]	47,5
Weight [kg]	2.48

## Dimensions

