

29641 XLED C35T 2,5W-SW



LED light source

5905339296412

1800K
SUPER
WARM



DE
CO
RI
function

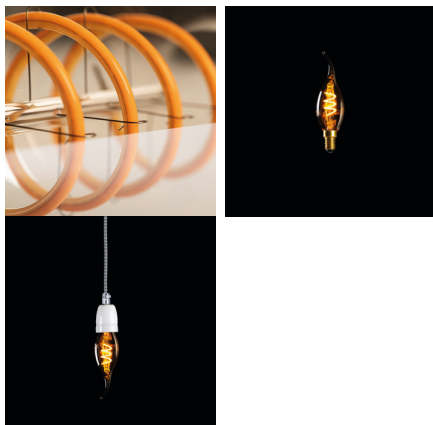

A decorative version of a bulb in the shape of a candle. Kanlux XLED C35T in this exceptional version will help you create a very cosy atmosphere. All thanks to a very warm colour of the light and an amber glass in which a spiral LED filament is enclosed. This bulb will look beautiful in table lamps, floor lamps or hanging lamps with an open lampshade. It will be a true decoration of our house, café table or a restaurant's chandelier, as well as suspension lamps without lampshades. It is an exceptional combination of a decorative nature, vintage style and modern energy-efficient LED technology.

TYPE OF LIGHT SOURCE:

Lighting technology used: LED

Non-directional or directional light source: NDLS

Mains or non-mains light source: MLS

Connected light source (CLS): no

Colour-tuneable light source: no

High luminance light source: no

Anti-glare shield: no

Dimmable: no

PRODUCT PARAMETERS:

Colour: amber

Compatible with a dimmer: no

Diameter [mm]: 35

Mercury content: no

Rated voltage [V]: 220-240 AC

Rated frequency [Hz]: 50

Lamp rated current [mA]: 19

Rated power [W]: 2.5

Lampshade material: glass

Light source: C35

Diode type: LED FILAMENT

Colour temperature: super warm

Cap: E14

Rated lamp-service life [h]: 15000

Number of on/off cycles: ≥15000

Light source shape: swieczka

GENERAL PRODUCT PARAMETERS:

Energy consumption in on-mode (kWh/1000h): 3


Energy efficiency class: G

Useful luminous flux Φ_{use} [lm]: 135

Useful luminous flux Φ_{use} [lm]: in sphere (360°)

29641 XLED C35T 2,5W-SW

LED light source

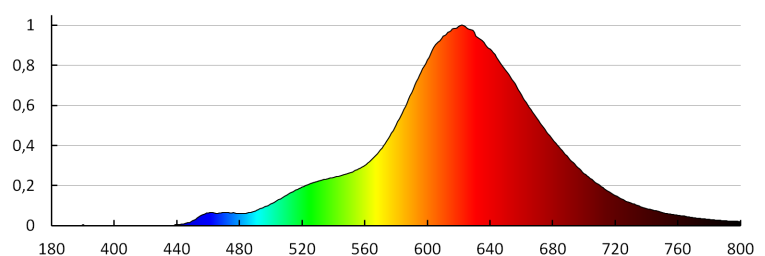Correlated colour temperature [K]: 1800**On-mode power P_{on} [W]:** 2.5**Height [mm]:** 123**Width [mm]:** 35**Depth [mm]:** 35**Colour rendering index:** 80**Chromaticity coordinates (x):** 0.549**Chromaticity coordinates (y):** 0.408**Claim of equivalent power [W]:** 14**PARAMETERS FOR LED AND OLED LIGHT SOURCES:****R9 colour rendering index value:** 21**Survival factor:** ≥ 0.9 **The lumen maintenance factor:** 0.93**PARAMETERS FOR LED AND OLED
MAINS LIGHT SOURCES:****Displacement factor ($\cos \phi_1$):** 0.5**Colour consistency in McAdam ellipses:** ≤ 6 **LED light source replaces a fluorescent light source
without integrated ballast of a particular wattage:** Not
applicable**Flicker metric ($P_{st} LM$):** $\leq 1,0$ **Stroboscopic effect metric (SVM):** $\leq 0,4$ **LOGISTIC DATA:****Unit of measurement:** unit**Packaging method:** 10**Number of units in the secondary packaging:** 10**Number of units in the packaging:** 100**Net unit weight [g]:** 14**Grammage [g]:** 38.4**Length of a unit pack [cm]:** 4**Width of a unit pack [cm]:** 4**Height of a unit pack [cm]:** 13**Weight of a cardboard box [kg]:** 3.84**Width of a cardboard box [cm]:** 21.5**Height of a cardboard box [cm]:** 28**Length of a cardboard box [cm]:** 42.5**Volume of a cardboard box [m³]:** 0.025585

29641 XLED C35T 2,5W-SW

LED light source

