

## LED G4 PREMIUM




---

Power	<b>2,5 W</b>
Luminous flux**	<b>270 lm (360°)</b>
Beam angle	<b>270 °</b>

Voltage	<b>12 V</b>
Colour of light	<b>WW</b>
Socket	<b>G4</b>



---



 Declaration of Conformity

Technical data:

Code	WOJ+14430
Power	2,5 W
Nominal current	300 mA
Voltage	12 V
Energy efficiency class	F
Energy consumption	3 kWh/1000h
Frequency	50HZ Hz
Useful luminous flux*	270 lm (360°)
Luminous flux**	270 lm (360°)
Lamp efficacy	108 lm/W
Colour of light	WW
Beam angle	270 °
RA	80
Uniformity of color SDCM max	5
Dimmable	-
Working temperature range	-20/+40 °
Lifespan	50000 h
Socket	G4
Dimension (AxBxC)	ø13x45 mm
Weight	0.004 kg
For use	N,A
Number of pieces on the packaging	100 pcs.
Made in	PRC

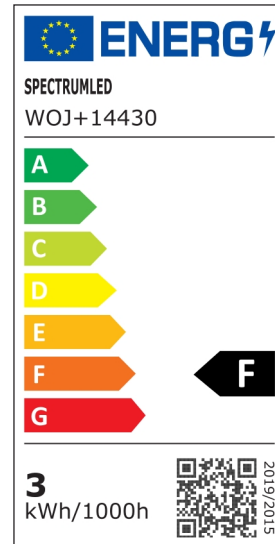

\*applies to the LED source used. \*\*Luminaire luminous flux