

29643 XLED ST64 5W-SW


LED light source

5905339296436

1800K
SUPER
WARM



DE
CO
RI
function



A decorative version of a bulb of atypical shape. Kanlux XLED ST64 DECO will help you take care of a cosy atmosphere. All thanks to a very warm colour of the light and an amber glass in which a spiral LED filament is enclosed. This bulb will look beautiful in table lamps, floor lamps or hanging lamps with an open lampshade. It will be a true decoration of your house, café, restaurant and any other place in which you will install it. It is an exceptional combination of a decorative nature, an unusual designer shape and LED energy-efficient technology.

TYPE OF LIGHT SOURCE:

Lighting technology used: LED

Non-directional or directional light source: NDLS

Mains or non-mains light source: MLS

Connected light source (CLS): no

Colour-tuneable light source: no

High luminance light source: no

Anti-glare shield: no

Dimmable: no

PRODUCT PARAMETERS:

Colour: amber

Compatible with a dimmer: no

Diameter [mm]: 64

Mercury content: no

Rated voltage [V]: 220-240 AC

Rated frequency [Hz]: 50

Lamp rated current [mA]: 40

Rated power [W]: 5

Lampshade material: glass

Light source: ST64

Diode type: LED FILAMENT

Colour temperature: super warm

Cap: E27

Rated lamp-service life [h]: 15000

Number of on/off cycles: ≥15000

Light source shape: standardowa

GENERAL PRODUCT PARAMETERS:

Energy consumption in on-mode (kWh/1000h): 5

Energy efficiency class: G

Useful luminous flux Φ_{use} [lm]: 270

Useful luminous flux Φ_{use} [lm]: in sphere (360°)

Correlated colour temperature [K]: 1800

29643 XLED ST64 5W-SW

LED light source



On-mode power P_{on} [W]: 5

Height [mm]: 140

Width [mm]: 64

Depth [mm]: 64

Colour rendering index: 80

Chromaticity coordinates (x): 0.549

Chromaticity coordinates (y): 0.408

Claim of equivalent power [W]: 26

PARAMETERS FOR LED AND OLED LIGHT SOURCES:

R9 colour rendering index value: 21

Survival factor: ≥ 0.9

The lumen maintenance factor: 0.93

PARAMETERS FOR LED AND OLED MAINS LIGHT SOURCES:

Displacement factor ($\cos \phi_1$): 0.5

Colour consistency in McAdam ellipses: ≤ 6

LED light source replaces a fluorescent light source without integrated ballast of a particular wattage: Not applicable

Flicker metric (Pst LM): $\leq 1,0$

Stroboscopic effect metric (SVM): $\leq 0,4$

LOGISTIC DATA:

Unit of measurement: unit

Packaging method: 10

Number of units in the secondary packaging: 10

Number of units in the packaging: 80

Net unit weight [g]: 42

Grammage [g]: 84.25

Length of a unit pack [cm]: 7

Width of a unit pack [cm]: 7

Height of a unit pack [cm]: 15.5


Weight of a cardboard box [kg]: 6.74

Width of a cardboard box [cm]: 38

Height of a cardboard box [cm]: 34

Length of a cardboard box [cm]: 58.5

Volume of a cardboard box [m³]: 0.075582

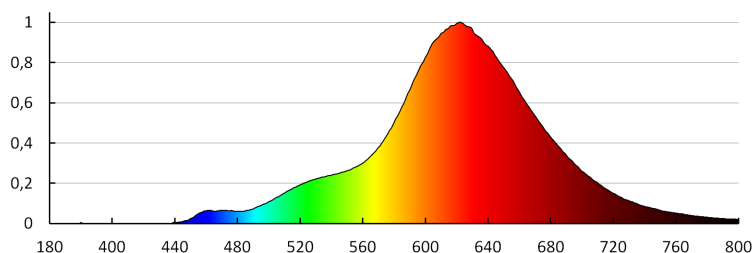

29643 XLED ST64 5W-SW

LED light source

