


LED CONTROLLER RGBW 12-24VDC 12A FUT038S



LED Controller RGBW 12-24VDC 12A Milight FUT038S - improved version of the FUT038 is a small device used to control LED RGBW lighting. It allows you to change the light intensity and color of the connected RGBW LED strip, Control via a remote control or smartphone application (Wi-Fi bridge WL-BOX1 required). Can working in two frequency high (8kHz) or low (500Hz).

Compatible products

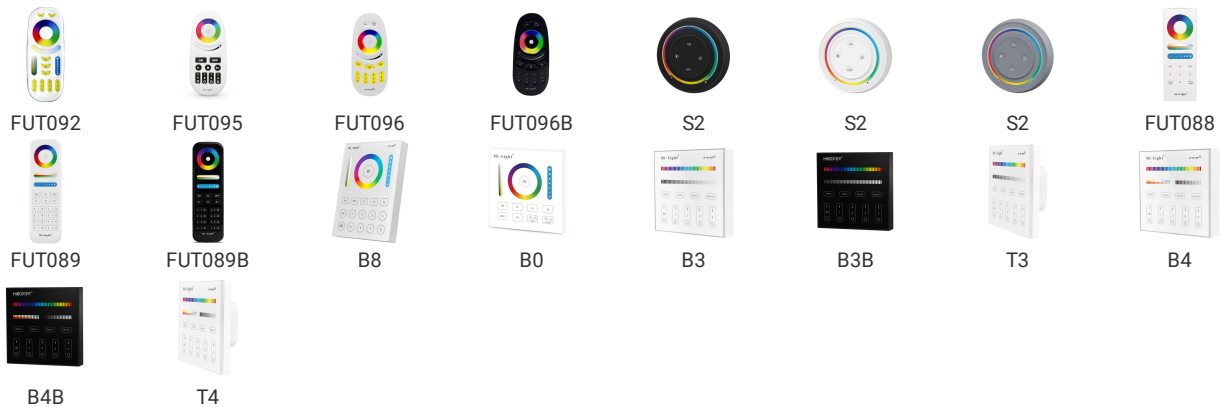

Specification

Parameter	Value
Symbol	FUT038S
ETIM CLASS	Controller for luminaires
Control distance [m]	30
Transmission Frequency [MHz]	2400
Input voltage	12 - 24V DC
Max. output current [A]	12
Length [mm]	74.5
Width [mm]	36
Height/depth [mm]	17
Weight [kg]	0.041