

32520 TONIL LED B

LED wall mounted fitting

5905339325204



Kanlux TONIL LED is a wall lamp modest in shape with an integrated source of light. Its elastic rubber arm makes it possible to direct light to a desired direction, at the same time giving an even shape to the fitting.

GENERAL DATA:

Colour: black

Place of assembly: wall mounted

Place of application: Indoors

Minimum distance from the illuminated object: 0,2m

Compatible with a dimmer: no

On switch: yes

Length [mm]: 370

Width [mm]: 51

Height [mm]: 121

Integrated LED light source: yes

TECHNICAL DATA:

Rated voltage [V]: 220-240 AC

Rated frequency [Hz]: 50

Maximum power [W]: 2,7

Class of protection against electric shock: II

Lampshade material: plastic

Diode type: LED SMD

Luminous flux [lm]: 100

Colour temperature: Warm white

Correlated colour temperature [K]: 3000

Colour consistency in McAdam ellipses: ≤ 6

Colour rendering index: 80

Service life [h]: 20000

Number of on/off cycles: ≥ 15000

Lighting angle [°]: 30

Luminous efficiency of the lamp [lm/W]: 37

Ambient temperature range to which the product can be exposed: 5÷25

Enclosure material: aluminum alloy

Connection type: Bolt terminal block

Range of sections of wires used [mm²]: 0,5-1,5

Lamp-heating time [s]: ≤ 1

Lamp-ignition time [s]: $\leq 0,5$


The fixture is movable horizontally [°]: 360

The fixture is movable vertically [°]: 360

IP class: 20

32520 TONIL LED B

LED wall mounted fitting



LOGISTIC DATA:

Packaging method: 50

Number of units in the secondary packaging: 1

Number of units in the packaging: 50

Net unit weight [g]: 300

Grammage [g]: 371.2

Length of a unit pack [cm]: 12.5

Width of a unit pack [cm]: 6

Height of a unit pack [cm]: 19


Weight of a cardboard box [kg]: 18.56

Width of a cardboard box [cm]: 31

Height of a cardboard box [cm]: 40

Length of a cardboard box [cm]: 65

Volume of a cardboard box [m³]: 0.0806

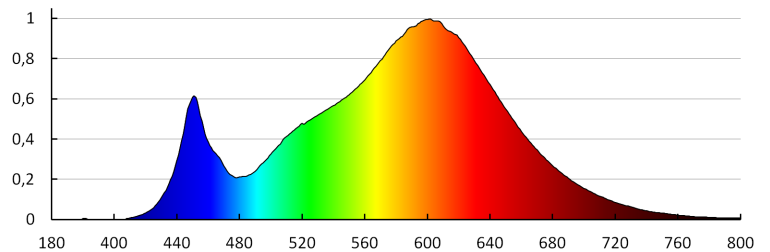

KANLUX S.A. (kat 32520) TONIL LED B / LDC (Polar)

Luminaire: KANLUX S.A. (kat 32520) TONIL LED B
Lamps: 1 x TONIL LED B

